


Technical Data - Cable

Directional Cycle Life Test for Continuous Flex Cables

schematic view

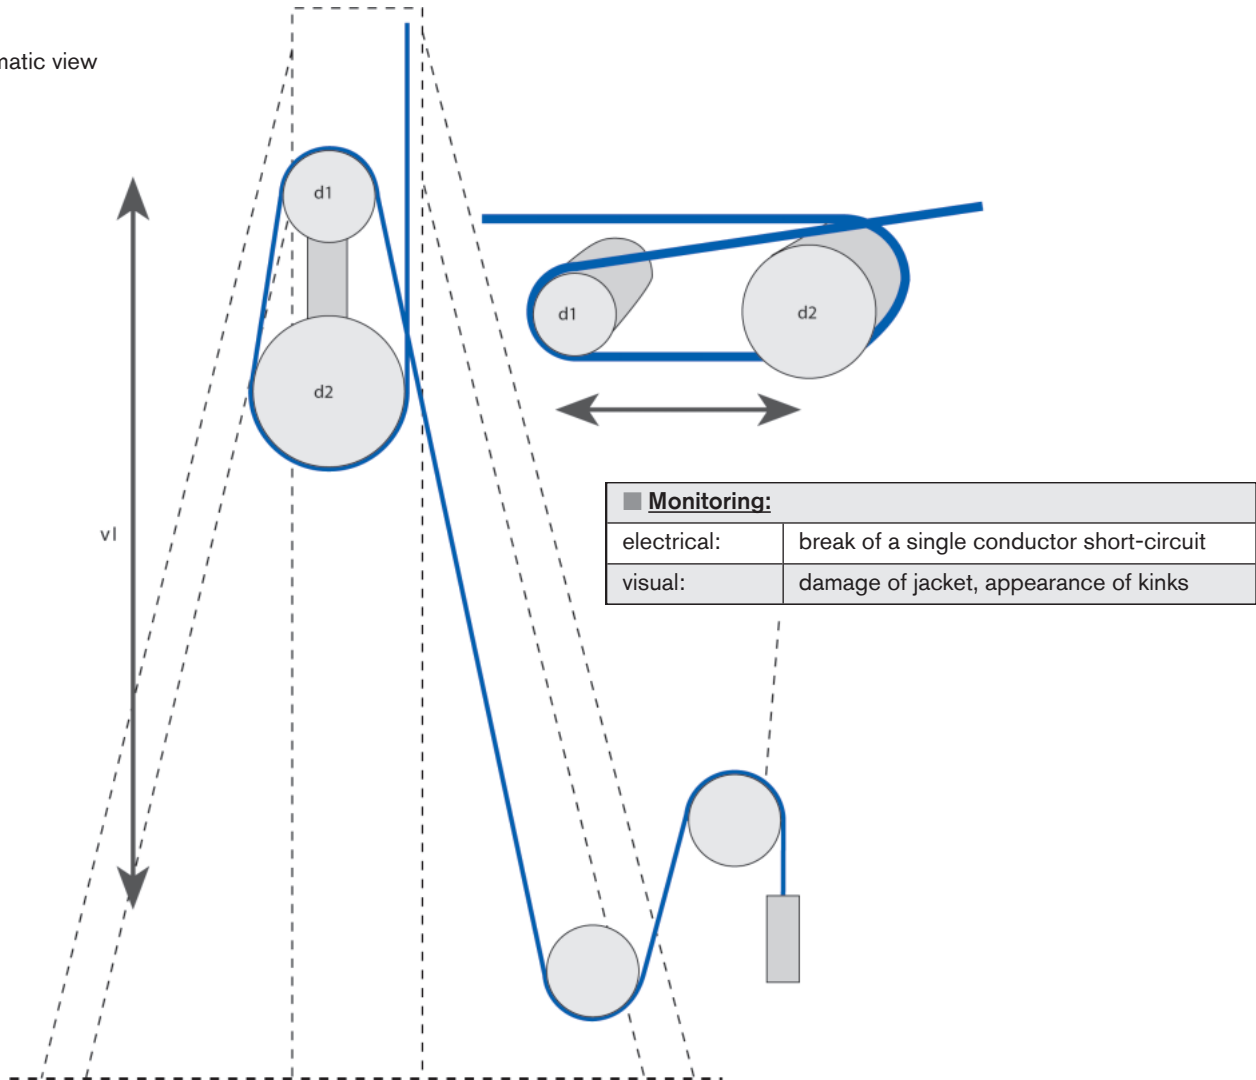

■ Test parameters:	
Acceleration:	40 m/s ² · 131.23 feet/s ²
Travel v1:	1900 mm/39.37 inches
Cable length in motion:	2700 mm/106.30 inches
Speed:	1.4 m/s · 4.59 feet/s
No. of bendings:	18 per min
Bending radius:	variable
Load:	variable
Roll diameter d1:	variable
Roll diameter d2:	variable

Test findings	S 200 (18 AWG/12c - 12 x 1.0 mm ²)	S 90 (18 AWG/12c - 12 x 1.0 mm ²)	S 86 (18 AWG/12c - 12 x 1.0 mm ²)
bending radius during test:	4.3 x O.D.	3.6 x O.D.	3.5 x O.D.
Travel:	1.9 m · 6.23 feet	1.9 m · 6.23 feet	1.9 m · 6.23 feet
Acceleration:	40 m/s ² · 131.23 feet/s ²	40 m/s ² · 131.23 feet/s ²	40 m/s ² · 131.23 feet/s ²
Temperature during test:	+10°C up to +22°C	+10°C up to +22°C	+10°C up to +22°C
Speed:	1.4 m/s · 4.59 feet/s	1.4 m/s · 4.59 feet/s	1.4 m/s · 4.59 feet/s
Dimension:	10.4 mm · 0.41 inches	12.5 mm · 0.49 inches	12.9 mm · 0.51 inches
Roll diameter d1:	90 mm · 0.295 feet	90 mm · 0.295 feet	90 mm · 0.295 feet
Roll diameter d2:	125 mm · 0.41 feet	125 mm · 0.41 feet	125 mm · 0.41 feet
No. of bendings:	17,438,485	2,929,730	2,508,904