


Halogen-free Cables

SABIX® A 285 FRNC X

SABIX® Rail - Control cable with numbered conductors, overall tinned copper shield, cross linked

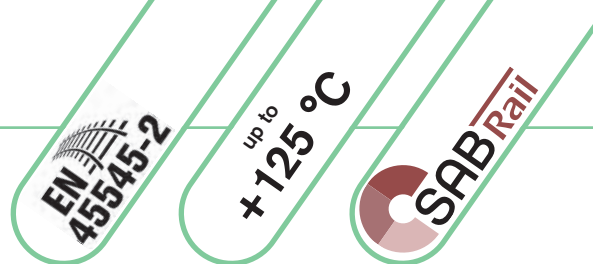

· D-VIERSEN · SABIX® A 285 FRNC X 5 x 0.5 mm² CE



Marking for SABIX® A 285 FRNC X 62850505:

SAB BRÖCKSKES · D-VIERSEN · SABIX® A 285 FRNC X 5 x 0.5 mm² CE

Construction:

Conductor:	tinned copper strands fine wires acc. to IEC 60228, VDE 0295, class 5
Insulation:	special SABIX®
Color code:	white conductors with consecutive numbers acc. to EN 50334 + VDE 0293-334
Stranding:	in layers
Wrapping:	foil
Shielding:	tinned copper braiding
Jacket material:	special SABIX®
Jacket color:	black (RAL 9005)

Outstanding features:

- low smoke halogen-free (LSHF)
- good EMC characteristics*
- no flame propagation
- flame retardant and self-extinguishing
- good ozone resistance
- good oil and chemical resistance
- fulfills fire protection requirements R15 (EL1A)
acc. to EN 45545-2 for hazard levels HL1-3

*copper braiding should be connected circularly to optimize the EMC characteristics

Technical data:

Nominal voltage:	Uo/U 300/500 V
Testing voltage:	conductor/conductor: 2000 V conductor/shielding: 2000 V
Min. bending radius:	10 x O.D.
Temperature range: <i>in conduit,</i> <i>fixed installation:</i>	-50/+125°C
Halogen-free:	acc. to EN 50306-1 + EN 50264-1 are fulfilled. Development of HCl is < 0.5% acc. to IEC 60754-1. pH-value is > 4.3 acc. to IEC 60754-2. Conductivity is < 10.0 µS/mm acc. to IEC 60754-2. Fluoric content < 0.1% acc. to IEC 60684-2
Burning characteristics:	No flame propagation acc. to IEC 60332-3-24, IEC 60332-3-25 EN 50305 section 9.1.2. Flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2
Toxicity:	acc. to EN 50305+ VDE 0260-305
Smoke density:	acc. to IEC 61034 + VDE 0482-1034
Approvals:	CE, EAC, RoHS
Absence of harmful substances:	acc. to RoHS directive of the European Union see page O/30

item no.	no. of conductors	nominal outer-ø inch ±5%	mm ±5%	cable weight ≈lbs/mft	ohmic resistance at 20°C max. Ω/km	heating value approx. KWh/km
► 20 AWG (≈ 16/32) ▪ 0.50 mm²						
62850305	3	0.205	5.2	30	40.1	99
62850505	5	0.248	6.3	46	40.1	154
62850805	8	0.311	7.9	65	40.1	237
62851005	10	0.339	8.6	77	40.1	258
62851205	12	0.350	8.9	85	40.1	288
► 19 AWG (≈ 23/32) ▪ 0.75 mm²						
62850607	6	0.303	7.7	68	26.7	231
62850807	8	0.358	9.1	89	26.7	305
62851007	10	0.409	10.4	116	26.7	381

item no.	no. of conductors	nominal outer-ø inch ±5%	mm ±5%	cable weight ≈lbs/mft	ohmic resistance at 20°C max. Ω/km	heating value approx. KWh/km
► 18 AWG (≈ 30/32) ▪ 1.00 mm²						
62850310	3	0.244	6.2	44	20.0	155
62850610	6	0.323	8.2	84	20.0	285
62850810	8	0.386	9.8	108	20.0	366
62851010	10	0.425	10.8	134	20.0	401

Other dimensions and colors are available on request