

Ventilation Plugs


VP Vent Plug Metal

Stainless steel vent plug

Metric & PG
Thread

Vent plugs are used to balance the pressure in an enclosure to protect electronic connections from condensation. They are UL approved and chemical resistant. The vent plugs are stainless steel AISI 303 and come with different air flow ratings.


Style C

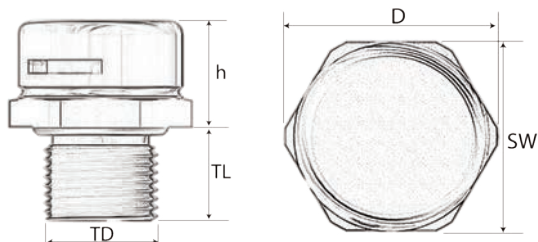


Technical data:	
Body:	Stainless steel AISI 303
Cap:	Stainless steel AISI 303
Vent element:	Acrylic Co-Polymer on Nylon Support
Seal:	Chloroprene (CR)
Washer:	Neoprene (NBR)
Protection type:	IP 67/68 (for water intrusion pressure oil bar)
Temperature range:	
permanent:	-20°C to +100°C
intermittent:	-30°C to +150°C
Approvals:	cURus



Style D

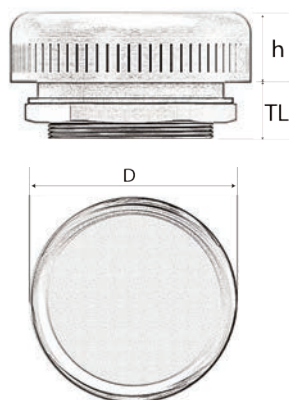

Style G

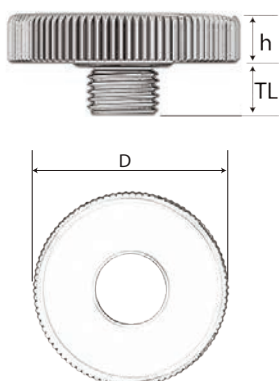

Part Number	Style	Average Air Flow l/h	Water Intrusion Pressure bar	Thread Size	Thread Length (TL) inches	Thread Diameter (TD) inches	Wrenching Flats (SW) inches	Outer Diameter (D) inches	max. Height (H) inches	UL
VPM-01	G	4	0.9	M4x0.7	0.118	0.157	-	0.484	0.106	-
VPM-02	G	7	0.5	M4x0.7	0.118	0.157	-	0.484	0.106	-
VPM-03	C	16	0.9	M12x1.5	0.236	0.472	0.669	0.740	0.433	cURus
VPM-03L	C	16	0.9	M12x1.5	0.394	0.472	0.669	0.740	0.433	cURus
VPM-04	C	16	0.9	PG 7	0.413	0.492	0.669	0.740	0.433	cURus
VPM-05	C	16	0.9	M16x1.5	0.236	0.630	0.709	0.787	0.472	-
VPM-05H	C	16	0.9	M16x1.5	0.236	0.630	0.709	0.787	0.630	-
VPM-06	C	16	0.9	M20x1.5	0.236	0.787	0.866	0.965	0.512	-
VPM-06H	C	16	0.9	M20x1.5	0.236	0.787	0.866	0.965	0.669	-
VPM-07	C	25	0.5	M12x1.5	0.236	0.472	0.669	0.740	0.433	cURus
VPM-07L	C	25	0.5	M12x1.5	0.394	0.472	0.669	0.740	0.433	cURus
VPM-08	C	25	0.5	PG 7	0.413	0.492	0.669	0.740	0.433	cURus
VPM-09	C	25	0.5	M16x1.5	0.236	0.630	0.709	0.787	0.472	-
VPM-09L	C	25	0.5	M16x1.5	0.236	0.630	0.709	0.787	0.630	-
VPM-10	C	25	0.5	M20x1.5	0.236	0.787	0.866	0.965	0.512	-
VPM-10H	C	25	0.5	M20x1.5	0.236	0.787	0.866	0.965	0.669	-
VPM-11	G	35	0.2	M4x0.7	0.118	0.157	-	0.484	0.106	-
VPM-12	G	100	0.1	M4x0.7	0.118	0.157	-	0.484	0.106	-
VPM-13	C	120	0.2	M12x1.5	0.236	0.472	0.669	0.740	0.433	cURus
VPM-13L	C	120	0.2	M12x1.5	0.394	0.472	0.669	0.740	0.433	cURus
VPM-14	C	120	0.2	PG 7	0.413	0.492	0.669	0.740	0.433	cURus
VPM-15	C	120	0.2	M16x1.5	0.236	0.630	0.709	0.787	0.472	-
VPM-15H	C	120	0.2	M16x1.5	0.236	0.630	0.709	0.787	0.630	-
VPM-16	C	120	0.2	M20x1.5	0.236	0.787	0.866	0.965	0.512	-
VPM-16H	C	120	0.2	M20x1.5	0.236	0.787	0.866	0.965	0.669	-
VPM-17	D	120	0.9	M40x1.5	0.394	1.575	-	2.283	0.807	cURus
VPM-18	C	300	0.1	M12x1.5	0.236	0.472	0.669	0.740	0.433	cURus
VPM-18L	C	300	0.1	M12x1.5	0.394	0.472	0.669	0.740	0.433	cURus
VPM-19	C	300	0.1	PG 7	0.413	0.492	0.669	0.740	0.433	cURus
VPM-20	C	300	0.1	M16x1.5	0.236	0.630	0.709	0.787	0.472	-
VPM-20H	C	300	0.1	M16x1.5	0.236	0.630	0.709	0.787	0.630	-
VPM-21	C	300	0.1	M20x1.5	0.236	0.787	0.866	0.965	0.512	-
VPM-22	D	375	0.5	M40x1.5	0.394	1.575	-	2.283	0.807	cURus
VPM-23	D	1350	0.2	M40x1.5	0.394	1.575	-	2.283	0.807	cURus
VPM-24	D	2200	0.1	M40x1.5	0.394	1.575	-	2.283	0.807	cURus